

Lil' Orbits

Foodservice Equipment Solutions



Self Contained Sink Modules

The SM400 Four Compartment Sink System

- Easy To Use
- ETL - Listed
- Professional

This system is specifically designed for locations where permanent plumbing is not available or is not cost effective to install. Perfect for food kiosks, outdoor catering, food sampling sites, ect.. where sanitary requirements demand washing facilities. There are no permanent hook-ups required, simply fill your fresh water holding tank and plug in the power cord and the unit is ready to go. Designed to meet most any health requirements for washing, rinsing and sanitizing as well as a separate hand washing sink.

The durable 100% Stainless Steel cabinet is mounted on heavy-duty casters for portability. Includes a deep drawn Stainless Steel 3 compartment drop-in sink and a full size seamless Stainless Steel lavatory sink for easy and convenient access. Fresh water plumbing system is constructed of food grade tube and fittings. Equipped with "In-Line" water filter and check valve.

Specifications:

Dimensions: "72 wide x 24" deep x 40" high

Electrical: 16 amps., 20 amp. circuit required

Weight: 290 lbs, (420 lbs. crated shipping weight)

Construction: Food grade Stainless Steel

Three Compartment Stainless Steel Sink.

Deep-drawn seamless. Each compartment measures 10" x 14" x 9.5" deep.

Electrical Controls.

All wiring is enclosed in conduit. Controls include 1.5 amp.fuse (for pump), water heater power switch and pump power switch.

6 Gallon Water Heater.


U.L. approved 120v 1500 watts.

Demand Water Pump.

Maintains 45 lbs. water pressure, 120 volts, 80 watts

Dolly Carriage Makes It Easy.

Roll the dolly to your facilities for filling and draining water tanks. Large diameter pull gate drain system.

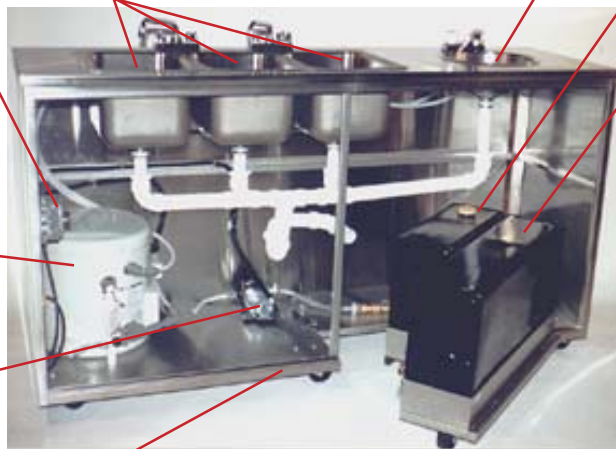

Features include a quick recovery, thermostat controlled 6 gallon hot water heater, 9 gallon fresh water and 15 gallon waste water holding tanks mounted on a dolly carriage for easy filling and disposal. Fused demand water pump keeps your water pressure at a constant 45 lbs of pressure. Can also be connected directly to local water supply at the water inlet fitting if desired.

Lavatory Sink.

Stainless Steel, 11.5" in diameter by 5.5" deep.

Fresh Water Tank.

9 gallon capacity, ABS plastic with water level gauge.

Waste Water Tank.

15 gallon capacity, ABS plastic with water level gauge

Lil' Orbits, Inc.

2850 Vicksburg Lane
Minneapolis, MN 55446 USA

Call: (763) 559-7505

Toll-Free: (800) 228-8305

Fax: (763) 559-7545

E-mail: contact@lilorbits.com

Web: <http://www.lilorbits.com>